

IM-6700系列

适用于IKS-6726-2GTXSFP/IKS-6728-4GTXSFP系列交换机的快速以太网模块

规格

IM-6700系列快速以太网接口模块



IM-6700-8TX



IM-6700-8SFP*



IM-6700-6SSC
IM-6700-6MSC



IM-6700-6MST



IM-6700-2MSC4TX
IM-6700-2SSC4TX



IM-6700-2MST4TX



IM-6700-4MSC2TX
IM-6700-4SSC2TX



IM-6700-4MST2TX

* 参考页1-84选择SFP-1FE快速以太网模块

接口

RJ45口: 10/100BaseT(X)速度自侦测, 全/半双工模式和自动MDI/MDI-X的连接

光口: 100BaseFX口 (SC/ST或SFP LC接头)

LED指示灯: 10/100或TP口, 100M光口

电源需求

功耗:

IM-6700-8TX: 1.43 W

IM-6700-8SFP: 9.95 W

IM-6700-6MSC, -6MST, -6SSC: 8.20 W

IM-6700-4MSC2TX, -4MST2TX, -4SSC2TX: 5.72 W

IM-6700-2MSC4TX, -2MST4TX, -2SSC4TX: 3.45 W

机械特性

重量:

IM-6700-8TX: 225 g

IM-6700-8SFP: 295 g

IM-6700-6MSC, -6MST, -6SSC: 390 g

IM-6700-4MSC2TX, -4MST2TX, -4SSC2TX: 270 g

IM-6700-2MSC4TX, -2MST4TX, -2SSC4TX: 270 g

保修


保修期: 5年

光纤

	100BaseFX	
	多模	单模
波长	1300 nm	1310 nm
最大TX	-10 dBm	0 dBm
最小TX	-20 dBm	-5 dBm
RX灵敏度	-32 dBm	-34 dBm
链路预算	12 dB	29 dB
典型距离	5 km ^a 4 km ^b	40 km ^c
饱和度	-6 dBm	-3 dBm

a. 50/125 μm, 800 MHz*km光缆
b. 62.5/125 μm, 500 MHz*km光缆
c. 9/125 μm单模光缆

尺寸

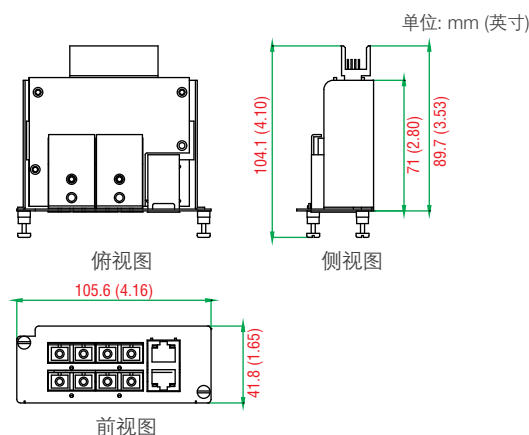

： 订购信息

兼容机架式以太网交换机系统

模块化机架式以太网交换机系统：

IKS-6726-2GTXSFP



IKS-6728-4GTXSFP



IM-6700系列快速以太网模块

可选型号	端口界面				
	10/100BaseT(X)	100BaseFX			100BaseSFP*
		多模, SC接头	多模, ST接头	单模, ST接头	
IM-6700-8TX	8	-	-	-	-
IM-6700-8SFP	-	-	-	-	8
IM-6700-6MSC	-	6	-	-	-
IM-6700-6MST	-	-	6	-	-
IM-6700-6SSC	-	-	-	6	-
IM-6700-4MSC2TX	2	4	-	-	-
IM-6700-4MST2TX	2	-	4	-	-
IM-6700-4SSC2TX	2	-	-	4	-
IM-6700-2MSC4TX	4	2	-	-	-
IM-6700-2MST4TX	4	-	2	-	-
IM-6700-2SSC4TX	4	-	-	2	-

*请参考页1-84关于SFP-1FE系列快速以太网SFP模块的产品信息。

包装清单

- IM-6700系列接口模块
- 保修卡